

## Limited warranty

The enclosed materials are provided «as is» without warranty of any kind, either expressed or implied, including but not limited to the implied warranties of merchant ability and fitness for a particular purpose. The entire risk as to quality and performance of the system and enclosed material is assumed by you

## SAFETY PRECAUTIONS

- Do not allow AS wire connecting (including grounded ones), AS wire and amplifier package connecting, AS wire connecting to ground, as this may cause amplifier output stages damage.
- Never push objects of any kind (needles, hair-pins, coins, insects) into this system.
- Do not put the system in damp circumstances, prevent from ingress of moisture and dust. (Do not place flower vases and other objects on the system).
- Prevent AS from heating. (Do not install AS near heat sources and prevent it from direct sunlight).
- Do not use petrol, alcohol and other solvents when cleaning, as they may damage stained surface. Clean only with dry soft cloth.
- In order to avoid electric shock and other accidents, never open the back cover for repair without any professional guidance.
- If AS do not operate, unplug it and refer to service personnel.

## Notes:

The specifications may be changed without preliminary notice.

# 2.0 Multimedia Speaker




## R215 User Manual

## Locating

- Place the speakers symmetrically to the listeners to the distance not less than one metre.
- Port tube is located at the back panel of the speaker cabinet, please locate it about 20—30 cm from the wall or other object.
- Place AS far away from TV sets as picture distortion in supersensitive monitors and TV sets is possible.

## Installation and operation guide

- Before connecting be sure that all components are switched off.
- Connect speakers with the link cable.
- 3.5mm audio jack of the signal cable into the output of the PC, MP3 etc.
- Plug power cable to power socket.
- Adjust the volume knobs to the minimum; press "power" button to turn on the speaker.
- Adjust the volume knob to the necessary volume.
- Adjust tone knob to desired level.

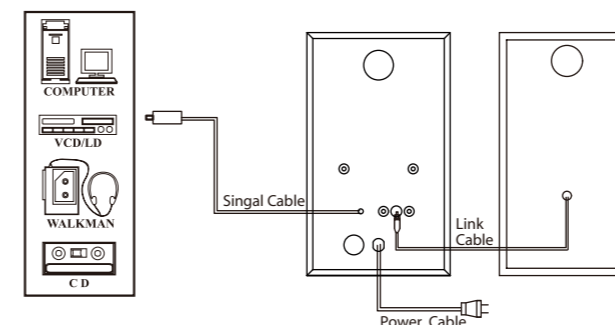

(Figure)

## Package contents

- Speakers -----2 pcs
- Operation Manual ----- 1pc

## Specification

Output power ----- 3W x2  
Voltage supply -----220-240V AC 50/60Hz

Speaker units  
woofer ----- 3"

S/N Ratio -----  $\geq 70$ dB  
Separation -----  $\geq 45$ dB

Impedance ----- 40hm  
Frequency Response -----80Hz~18KHz

Dimensions -----W117xD120xH207mm  
Weight -----2.1kg