


User Manual

F6000X
5.1 Computer Multimedia Speaker

SINCE 1993
F&D




Caution


- Do not place system in high temperatures or humid environments, keep the system dry and handle with care to avoid damage.
- In order to avoid electric shock and other accidents, do not open the back panel cover for repair without professional guidance.
- In case fragments or other liquids are accidentally sprinkled inside the cabinet, please switch off the power immediately.
- In case of repair, please come to F&D's professional maintenance for help.
- Switch off the power and unplug from the power jack when the system is not on work.
- Keep the cabinet air open far from the wall by 20mm at least and the air open should not be blocked.
- The devices do not support hard disk reading. Only support USB flash disk reading.

Packaging content

① Speaker	1set
② RCA to RCA cable	3pcs
③ RCA to 3.5mm cable	1pc
④ Remote control	1pc
⑤ Manual & warranty card	1pc




Front panel keys

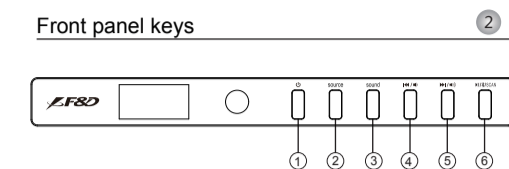

1. Standby	4. Previous/Decrease volume
2. Source	5. Next/Increase volume
3. Sound	6. Play/Pause/Scan/BT Pair

Remote control

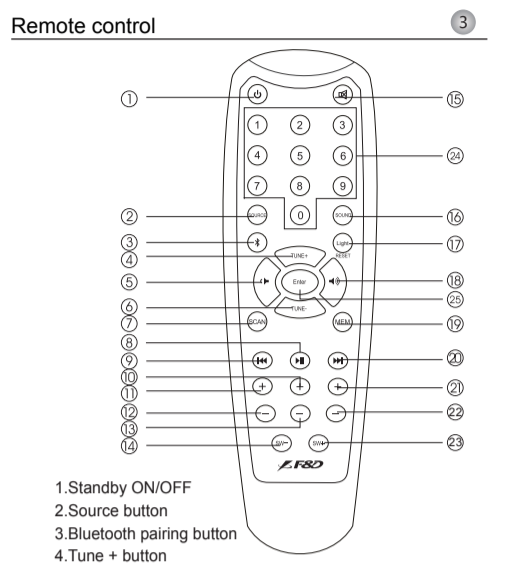

1. Standby ON/OFF	16. Sound
2. Source button	17. Light/Reset button
3. Bluetooth pairing button	18. Volume increase button
4. Tune + button	19. FM station Memory button
5. Volume decrease	20. Next button
6. Tune - button	21. Rear volume increase button
7. FM auto scan button	22. Rear volume decrease button
8. Play/Pause button	23. Bass increase button
9. Previous button	24. Numeric keys
10. Center volume increase button	25. Enter key
11. Front volume increase button	
12. Front volume decrease button	
13. Center volume decrease button	
14. Bass decrease button	
15. Press to mute or unmute the sound	

Remote control keys function

- Turn on/off unit.
- Source: Switch between BT,DVD,AUX,USB,OPTICAL and FM mode.
- short press to enter in to Bluetooth mode & long press will enter in to Pairing mode, LED display will flash fast.
- Tune +/-: FM mode: Fine Tuning: Short press to increase or decrease one step (100Khz), FM LED display flash once. Manual Tuning: Long press of this key works for Manual tuning, It finds the next available frequency.
- Volume +/-: Decrease or increase the master volume.
- Scan: FM mode: Short press to start Auto Search & this will store the found frequencies (channels) automatically.
- Play/Pause: a. USB Mode: Short press for play/pause the music playback. b. Bluetooth mode: short press to play/pause music.
- Previous: a. USB mode: Short press to select previous song and long press to select previous folder. b. FM mode: Short press to select previous stored station, FM LED display flash once.
- Bluetooth mode: short press to select previous song. 10/13. Center +/-: Increase or decrease volume of center speaker. 11/12. Front +/-: Increase or decrease the volume of front speakers. 14/23. SW +/-: Increase or decrease the volume of subwoofer. 15. Mute: Press it to mute or unmute the sound. 16. Sound: switch between Normal & Prologic sound effects. 17. Light/Reset: Short press this key to select desired color/Multi color/ Light OFF option. 19. MEM: Short press of this key work to store tuned station through Fine or Manual tuning. FM LED display flash once to indicate store/save operation. (max. 100 stations).
- Next: a. USB mode: Short press to select next song and long press to select next folder. b. FM mode: Short press to select next stored station, FM LED display flash once.
- Bluetooth mode: short press to select next song. 21/22. Rear +/-: Increase or decrease volume of rear speakers. 24. (0-9) Numeric Keys: a. USB Mode: directly press numeric keys through remote to select your favorite song if you know the song number in the folder. One folder limits to 999 songs and press '9 9 9' within short time to select 999th song.

Bluetooth pairing

Switch to Bluetooth mode, F6000X will automatically search the Bluetooth device. If the device paired before, F6000X will connect automatically.

If can't find paired device, F6000X will enter pairing mode automatically, bluetooth LED display under pairing button flashes quickly.


- Active "Bluetooth" function on your device and search for "Fenda F6000X". Enter "0000" if your device asks for the PIN code..
- After pairing successfully, bluetooth LED display will be bright, and ready for playing music.

Recommend to adjust suitable volume before playing music.

Tips: To make sure your PC or notebook is working well with our Bluetooth speakers, it is recommended that you check with your PC or notebook vendor first. Make sure the correct Bluetooth driver software is installed.

Optical mode

- Short press to switch audio source to Optical mode. Connect the speaker with audio source through Optical signal cable.
- Adjust volume while playing music.
- To play digital optical audio well on F6000X, please make sure to set "PCM mode" as digital output on your devices, such as Blue-ray DVD, TV and Video player, etc. Below as example.




SHENZHEN FENDA TECHNOLOGY CO., LTD. GUANGDONG, P.R.C.
ADD: Fenda Hi-Tech Park, Zhoushi Road, Shiyao, Baoan, Shenzhen, Guangdong, P.R.C.
Tel: +86-755-2748668 (800 line) Fax: +86-755-27103777 P.C.: 518108

SHENZHEN FENDA TECHNOLOGY CO., LTD.
ADD: Fenda Hi-Tech Park, Zhoushi Road, Shiyao, Baoan, Shenzhen, China
P.C.: 518108 http://www.fenda.com


Prologic function

- You can convert 2.0 channel into 5.0 PROLOGIC effect by selecting "PROLOGIC" through Sound key of remote.
- To get real 5.1 effect, connect 5.1 CH output of your DVD to the 5.1 input of F6000X & select "NORMAL" through the sound key of remote.

System connection

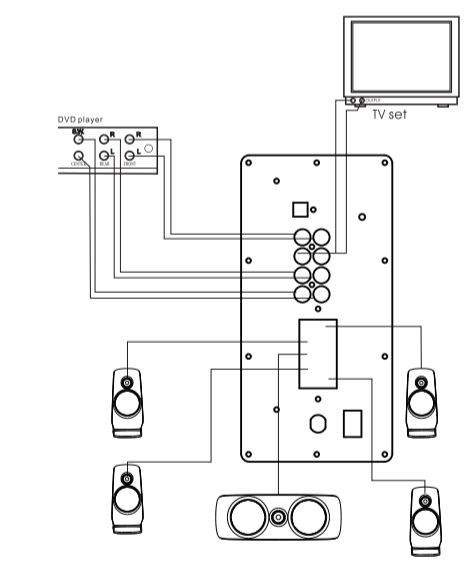

Instruction of rear board

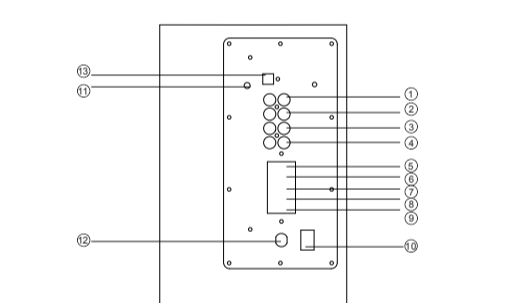

1. AUX L/R input	10. Power switch
2. DVD F.R/F.L input	11. FM antenna
3. DVD S.R/S.L input	12. Power cable
4. DVD SW/Center input	13. Optical input
5. Speaker front right output	
6. Speaker front left output	
7. Speaker center output	
8. Speaker rear right output	
9. Speaker rear left output	

Specifications

Output Power(RMS): 135W (60W + 15WX5)
Full range Satellite speaker: 3"
Subwoofer: 8"
Frequency response:
Sub-woofer amplifier: 25Hz-85Hz
Satellite amplifier: 60Hz-20KHz
S/N Ratio: >73dB
Separation: >50dB
Power: 120V-240V-50/60Hz 2A
Unit size:
FL, FR, SL, SR Satellites: W258xD102.5xH98mm
CENTER Speaker: W98xD100xH208mm
Subwoofer: W290xD412xH315mm
Net Weight: 11.2kg

F&D WARRANTY CARD

END-USER'S COPY
WARRANTY REGISTRATION CERTIFICATE

Mr./Mrs/Ms First Name: _____
Last Name: _____
Address: _____
Contact No.: _____
Product Name: _____
Model No.: _____
Serial No.: _____
Date Purchased: _____
Invoice No.: _____
Retail Outlet Where Purchased: _____

(Please print the name & address)

WARRANTY TERMS & CONDITIONS

The warranty will be effective only if the warranty card is completed and returned to the company within 14 days from the date of purchase. We guarantee the provision of free services of F&D product within the warranty period, from its date of purchase from our Authorised Dealer. The period and conditions of our warranty service are as follow:

- The warranty covers services by our F&D Authorised Dealer. This warranty card together with the receipt must be presented when servicing is required. This warranty card is irreplaceable in the event of loss.
- Repair services will be provided for defects arising from normal usage for the following period, commencing from the date of purchase from our F&D Authorised Dealer. (Parts would be replaced when necessary)
 - Parts: 1 year
 - Technical service free 1 year
- Under the following circumstances, service and parts will be chargeable even within the warranty period:
 - Failure to present the warranty card and receipt when servicing is required.
 - Full particulars not clearly shown or alterations made against the actual information. For e.g.: Alteration of the date of purchase, serial numbers-altered or removed.
 - This unit being tampered with, altered in any way by any unauthorised technicians or which has been subjected to misuse, negligence or accident. This guarantee does not cover damage occurring in transit by or from the customer.
 - The defect is caused by the attack of household pests, fire, lightning, natural disasters, pollution, abnormal voltage or the usage of generator.

Shenzhen Fenda Technology Co., Ltd.
Add: Fenda Hi-Tech Park, Zhoushi Road, Shiyao, Baoan, Shenzhen, China
P.C.: 518108 http://www.fenda.com

F&D WARRANTY CARD

DISTRIBUTOR'S COPY
WARRANTY REGISTRATION CERTIFICATE

Mr./Mrs/Ms First Name: _____
Last Name: _____
Address: _____
Contact No.: _____
Product Name: _____
Model No.: _____
Serial No.: _____
Date Purchased: _____
Invoice No.: _____
Retail Outlet Where Purchased: _____

(Please print the name & address)

WARRANTY TERMS & CONDITIONS

The warranty will be effective only if the warranty card is completed and returned to the company within 14 days from the date of purchase. We guarantee the provision of free services of F&D product within the warranty period, from its date of purchase from our Authorised Dealer. The period and conditions of our warranty service are as follow:

- The warranty covers services by our F&D Authorised Dealer. This warranty card together with the receipt must be presented when servicing is required. This warranty card is irreplaceable in the event of loss.
- Repair services will be provided for defects arising from normal usage for the following period, commencing from the date of purchase from our F&D Authorised Dealer. (Parts would be replaced when necessary)
 - Parts: 1 year
 - Technical service free 1 year
- Under the following circumstances, service and parts will be chargeable even within the warranty period:
 - Failure to present the warranty card and receipt when servicing is required.
 - Full particulars not clearly shown or alterations made against the actual information. For e.g.: Alteration of the date of purchase, serial numbers-altered or removed.
 - This unit being tampered with, altered in any way by any unauthorised technicians or which has been subjected to misuse, negligence or accident. This guarantee does not cover damage occurring in transit by or from the customer.
 - The defect is caused by the attack of household pests, fire, lightning, natural disasters, pollution, abnormal voltage or the usage of generator.

Shenzhen Fenda Technology Co., Ltd.
Add: Fenda Hi-Tech Park, Zhoushi Road, Shiyao, Baoan, Shenzhen, China
P.C.: 518108 http://www.fenda.com

展开尺寸	525X154MM		时间	20180817	订单号	FE18226	
成型尺寸	75X154MM		品牌	F6000X	客户型号	F6000X	
材质要求	105g铜版纸	版本	A0	设计内容	说明书	料号	17.7.030.1692
印刷要求	单黑正反印刷	电子件		结构		PLM文档编号	
工艺要求	无处理	设计者	杨改改	标准化		项目经理	
页码数(页)	折页	复核		业务		产品经理	